

1A Schottky Barrier Rectifiers

PRODUCT SUMMARY

Voltage ratings available from 20 Volts to 60 Volts


DO-204AL/DO-41

FEATURES

- Metal-Semiconductor junction with guardring
- Epitaxial construction
- Low forward voltage drop
- High current capability
- The plastic material carries UL recognition 94V-0
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

MECHANICAL DATA

- Case : JEDEC DO-204AL(DO-41) molded plastic
- Polarity : Color band denotes cathode
- Weight : DO-41 - 0.012 ounce, 0.33 gram
- Mounting position : Any

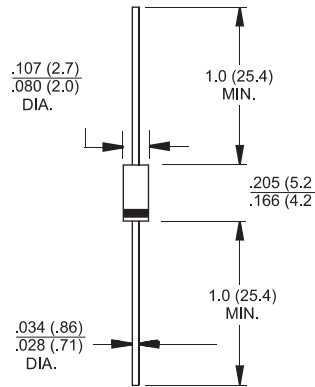

Dimensions in inches and (millimeters)

 **Pb-free; RoHS-compliant**

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Rating at 25°C ambient temperature unless otherwise specified.
- Single phase, half wave, 60 Hz, resistive or inductive load.
- For capacitive load, derate current by 20%






Parameter	Symbols	SB120	SB130	SB140	SB150	SB160	Units
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	Volts
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	Volts
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	Volts
Maximum average forward rectified current .375" (9.5mm) lead lengths @ $T_L=100^\circ\text{C}$	$I_{(AV)}$	1.0					Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	40.0					Amps
Maximum forward voltage at 1.0A DC	V_F	0.50			0.70		Volts
Maximum DC reverse current @ $T_J=25^\circ\text{C}$ at rated DC blocking voltage @ $T_J=100^\circ\text{C}$	I_R	0.5			10.0		mA
Typical junction capacitance (Note 1)	C_J	110			80		pF
Typical thermal resistance (Note 2)	R_{JUL}	15					$^\circ\text{C/W}$
Operating junction temperature range	T_J	-55 to +125					$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +150					$^\circ\text{C}$

Notes: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Thermal resistance, junction to lead.

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

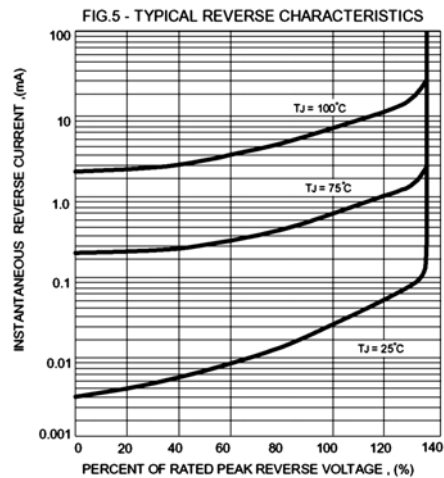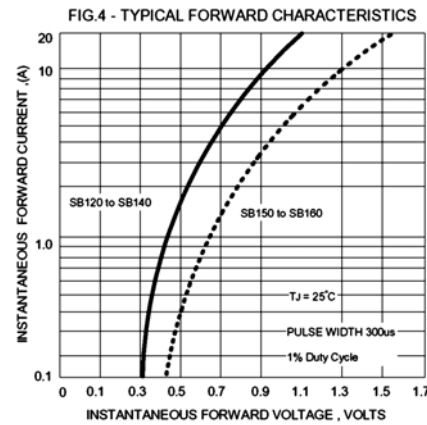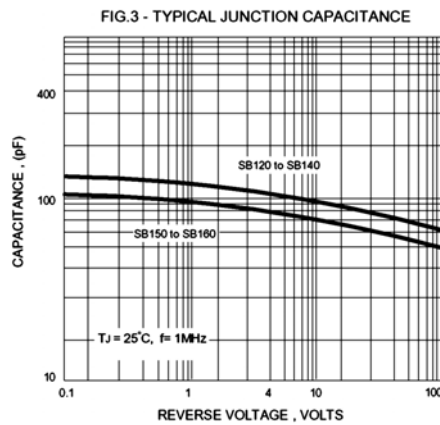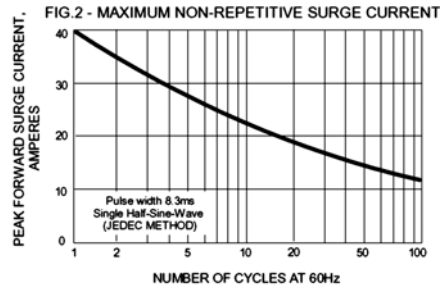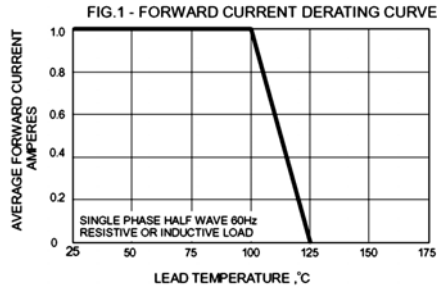

Information furnished by Silicon Standard Corporation is believed to be accurate and reliable. However, Silicon Standard Corporation makes no guarantee or warranty, expressed or implied, as to the reliability, accuracy, timeliness or completeness of such information and assumes no responsibility for its use, or for infringement of any patent or other intellectual property rights of third parties that may result from its use. Silicon Standard reserves the right to make changes as it deems necessary to any products described herein for any reason, including without limitation enhancement in reliability, functionality or design. No license is granted, whether expressly or by implication, in relation to the use of any products described herein or to the use of any information provided herein, under any patent or other intellectual property rights of Silicon Standard Corporation or any third parties.